


PH179 - R14

Applicable Standard: SAE J517 - 100R14

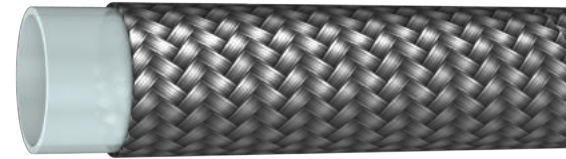

Construction

Core Sintered tube of polytetrafluoroethylene (P.T.F.E)

Reinforcement Single braid of 304 series of stainless steel wire

Application P.T.F.E hose has an excellent temperature characteristics both in high and low temperature, Excellent chemical resistance, non contamination properties, low coefficient of friction and resists deterioration. Therefore the hose is used generally in applications where all or one of the above properties is the main criteria

Note: Double braided available for higher performance, please check our part # PH381


Item Code	Dash Size	WT	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH179-3	-3	1.00	1/8	3.35	0.252	6.4	3,260	225	13,040	900	1.6	40	65
PH179-4	-4	0.75	3/16	4.83	0.300	7.6	3,000	210	12,000	840	2.0	50	84
PH179-5	-5	0.65	1/4	6.48	0.380	9.7	3,000	210	12,000	840	3.0	75	121
PH179-6	-6	0.75	5/16	8.00	0.440	11.2	2,500	175	10,000	700	4.0	100	163
PH179-7	-7	0.75	3/8	9.65	0.495	12.6	2,400	165	9,600	660	5.0	125	170
PH179-8	-8	0.75	13/32	10.41	0.543	13.8	2,000	140	8,000	560	5.3	135	185
PH179-10	-10	0.75	1/2	12.83	0.650	16.5	1,750	120	7,000	480	6.5	165	234
PH179-12	-12	0.90	5/8	16.00	0.780	19.8	1,270	88	5,080	352	8.0	200	318
PH179-14	-14	0.90	3/4	19.18	0.900	22.9	1,100	75	4,400	300	9.1	230	395
PH179-16	-16	1.00	7/8	22.23	1.030	26.2	900	62	3,600	248	9.1	230	462
PH179-18	-18	1.05	1	25.53	1.160	29.5	900	62	3,600	248	11.8	300	528
PH179-20	-20	1.20	1.1/8	28.58	1.300	33.0	630	44	2,520	176	16.1	410	585



Temperature Range: Continuous: -54°C to +260°C

PH311- (ELECTRICAL CONDUCTIVE) - R14

Applicable Standard: SAE J517 - 100R14

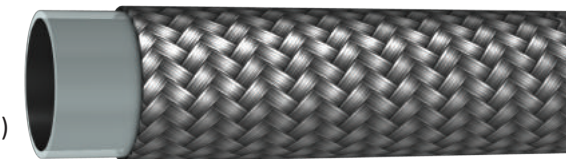

Construction

Core Sintered tube of polytetrafluoroethylene (P.T.F.E) (Electrical Conductive)

Reinforcement Single braid of 304 series of stainless steel wire

Application P.T.F.E hose has an excellent temperature characteristics both in high and low temperature, Excellent chemical resistance, non contamination properties, low coefficient of friction and resists deterioration. Therefore the hose is used generally in applications where all or one of the above properties is the main criteria

Note: Double braided available for higher performance, please check our part # PH383

Item Code	Dash Size	WT	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH311-3	-3	1.00	1/8	3.35	0.252	6.4	3,260	225	13,040	900	1.6	40	65
PH311-4	-4	0.75	3/16	4.83	0.300	7.6	3,000	210	12,000	840	2.0	50	84
PH311-5	-5	0.65	1/4	6.48	0.380	9.7	3,000	210	12,000	840	3.0	75	121
PH311-6	-6	0.75	5/16	8.00	0.440	11.2	2,500	175	10,000	700	4.0	100	163
PH311-7	-7	0.75	3/8	9.65	0.495	12.6	2,400	165	9,600	660	5.0	125	170
PH311-8	-8	0.75	13/32	10.41	0.543	13.8	2,000	140	8,000	560	5.3	135	185
PH311-10	-10	0.75	1/2	12.83	0.650	16.5	1,750	120	7,000	480	6.5	165	234
PH311-12	-12	0.90	5/8	16.00	0.780	19.8	1,270	88	5,080	352	8.0	200	318
PH311-14	-14	0.90	3/4	19.18	0.900	22.9	1,100	75	4,400	300	9.1	230	395
PH311-16	-16	1.00	7/8	22.23	1.030	26.2	900	62	3,600	248	9.1	230	462
PH311-18	-18	1.05	1	25.53	1.160	29.5	900	62	3,600	248	11.8	300	528
PH311-20	-20	1.20	1.1/8	28.58	1.300	33.0	630	44	2,520	176	16.1	410	585



Temperature Range: Continuous: -54°C to +260°C